



LIGHTING





BrightStar Lighting.....	4
BrightStar Hand Search Lights.....	5
BrightStar Head Torches.....	6
BrightStar Torches.....	7



Eflare Beacons.....	15
Eflare Accessories.....	16



FoxFury Scene Lights.....	22
FoxFury Right Angle Lights.....	23
FoxFury Head Torches.....	24
FoxFury Lights.....	25



Peli Lights.....	32
------------------	----



LedLensers Hand Torches.....	9
LedLensers Hand Held Lighting.....	10
LedLensers Head Torches.....	11
LedLensers Area Lights.....	13



SCANGRIP CONNECT Area Lights.....	18
SCANGRIP Area Lights.....	19
SCANGRIP Lights & Accessories.....	20



Tradetuff/JCB Lighting.....	27
TradeTuff/JCB Accessories.....	30



Other Lighting.....	33
Specialist Demarcation Lights & Signs.....	35
Industrial Beacon.....	36





The Razor torches are lightweight, fully waterproof and durable to withstand most abusive environments. They come with ATEX approvals and are intrinsically safe.



Downlight feature

RAZOR FSL

CAT NO	BS-60170
BATTERY	(3) AA batteries
BATTERY LIFE	Up to 24 hours
LUMENS	Up to 325 lumens
BEAM DISTANCE	Up to 236m
WEIGHT	226g



NEW RAZOR

CAT NO	BS-60160
BATTERY	(3) AA batteries
BATTERY LIFE	Up to 24 hours
LUMENS	325 lumens
BEAM DISTANCE	236m
WEIGHT	226g



BFL AREA LIGHT

BATTERY	2 x AAA alkaline batteries
BATTERY LIFE	Up to 200 hours
COLOURS	Red, White, Amber, Green, Blue
BEAM DISTANCE	305m
WEIGHT	96g

THE FREAKIN' BEACON

The Freakin' Beacon comes in multiple colors and runs for up to 400 hours.

- Green: 36 hours on steady and 144 hours on flash
- Blue: 48 hours on steady and 192 hours on flash
- Red, white & amber: 65 hours on steady and 200 hours on flash

The Freakin' Beacon is a Class I, Division 1 light with an IP67 rating.

CAT NO	BS-89000
BATTERY	Rechargeable Lithium-Ion Battery
BATTERY LIFE	Up to 56 hours
LUMENS	3000 High / 225 Low
BEAM DISTANCE	210m
WEIGHT	1.59kg

This palm-sized, lightweight, personal safety beacon can be programmed to a steady flash mode, random flashing mode or steady mode and seen from over 1000 feet away.



The Lighthawk LED lanterns are fully waterproof to 1m for 24 hours, have articulating heads along with multiple functions such as low battery indicator, LED charge status indicator & flashing LED tail lights. They also have the advantage of being wall and vehicle mountable.

BrightStar Hand Search Lights

Used in UK NHS Ambulance Trusts, Fire and Rescue Services and the RNLI.



LED LIGHTHAWK GEN II (INTRINSICALLY SAFE)

CAT NO	BS-07632-YELLOW
BATTERY	Rechargeable Lithium-Ion Battery
BATTERY LIFE	Up to 14 hours
LUMENS	300 lumens
BEAM DISTANCE	447m
WEIGHT	860g



LIGHTHAWK VISION 600

CAT NO	BS-07732-VISION
BATTERY	Rechargeable Lithium-Ion Battery
BATTERY LIFE	Up to 6.25 hours
LUMENS	600 lumens
BEAM DISTANCE	250m
WEIGHT	860g

BS-9B-1962-1

Lighthawk Battery, 4-Cell for Lighthawk GEN II & Vision

BS-9B-1963-2

Lighthawk Battery, 6-Cell for Lighthawk GEN II & Vision

BS-07690

Lighthawk Charger Base for Lighthawk GEN II

BS-20627

Lighthawk 240v Charger Lead with UK Plug

BS-07870

Lighthawk 12v Charger Lead

BS-21132

Shoulder Strap for Lighthawk

RIGHT ANGLE LIGHTS

Intrinsically Safe
Waterproof
Oversized On/Off Switch for gloved hands



CAT NO	BS-510221	BS-510304	BS-520304	BS-520221
MODEL	RIGHT ANGLE LED RECHARGEABLE	RIGHT ANGLE LED NON-RECHARGEABLE	PRO RIGHT ANGLE LED NON-RECHARGEABLE	PRO RIGHT ANGLE LED RECHARGEABLE
BATTERY	Rechargeable Lithium-Ion Battery	(6) AA batteries	(4) AA batteries	Rechargeable Lithium-Ion Battery
BATTERY LIFE	Up to 4 hours	Up to 17 hours	Up to 8 hours	Up to 8 hours
LUMENS	205 lumens	220 lumens	275 lumens	250 lumens
BEAM DISTANCE	477m	490m	458m	490m
WEIGHT	450g	454g	397g	312g



VISION LED HEADLAMP (INTRINSICALLY SAFE)



Get the illumination you need! High, low, spot or flood – while your hands are free to work. A great, affordable, all-around headlamp for all kinds of environments. Wear it with or without a hardhat or under a visor.

CAT NO	BS-200501
BATTERY	(3) AAA batteries
BATTERY LIFE	Up to 20 hours
LUMENS	185 lumens
BEAM DISTANCE	65m
WEIGHT	90g

VISION LED HEADLAMP RECHARGEABLE (INTRINSICALLY SAFE)

The best in class headlamp for optimal vision is now rechargeable.

CAT NO	BS-200521
BATTERY	Rechargeable Lithium-Ion Battery
BATTERY LIFE	Up to 100 hours
LUMENS	185 lumens
BEAM DISTANCE	63m
WEIGHT	99g



VISION FLOOD

Lightweight & bright, this flood headlamp can operate with or without touching a button.

CAT NO	BS-200511
BATTERY	2 x AAA alkaline batteries
BATTERY LIFE	Up to 13 hours
LUMENS	125 lumens
WEIGHT	85g

B.O.B (BIG OL' BEAM) HEADLAMP

The ultimate headlamp with 4 Light modes and red LED

CAT NO	BS-200551
BATTERY	3x AAA KBS Prime Batteries
BATTERY LIFE	Up to 11 hours
LUMENS	300 lumens
BEAM DISTANCE	100m
WEIGHT	99g



INTRINSICALLY SAFE:

The intrinsically safe certification on these lights gives you the absolute confidence to use the lights in the most hazardous environments without concern of any safety issues.

BrightStar Torches



BS-16460



BS-09050

WORKSAFE LED ATEX, ZONE 0

CAT NO	LIGHT OUTPUT	DISTANCE	BATTERY TYPE	RUN TIME	WATERPROOF	WEIGHT
BS-16460	80 lumens	100m	(2) D cell batteries	Up to 200 hours	Yes	130g
BS-09050	90 lumens	165m	(4) D cell batteries	Up to 150 hours	Yes	2.6kg



BS-15460



BS-08050

WORKSAFE LED (INTRINSICALLY SAFE)

CAT NO	LIGHT OUTPUT	DISTANCE	BATTERY TYPE	RUN TIME	WATERPROOF	WEIGHT
BS-15460	80 lumens	100m	(2) D cell batteries	Up to 200 hours	Yes	130g
BS-08050	90 lumens	165m	(4) D cell batteries	Up to 150 hours	Yes	2.6kg



This flashlight is built to withstand grease and chemicals, along with being crush resistant and having an 'unbreakable' lens

INDUSTRIAL LED

CAT NO	BS-11500
BATTERY	(2) D cell batteries
BATTERY LIFE	Up to 200 hours
LUMENS	60 lumens
BEAM DISTANCE	75m
WEIGHT	280g





P7R CORE

CAT NO	LENS-P7RCORE
BATTERY	Rechargeable Lithium-Ion Battery
BATTERY LIFE	Min: 2 hours / Max: 90 hours
LUMENS	1400 lumens
BEAM DISTANCE	300m
WEIGHT	202g



P6 CORE POLICE TORCH

CAT NO	LENS-P6CORE
BATTERY	3 x AAA Batteries
BATTERY LIFE	Up to 25 hours
LUMENS	300 lumens
BEAM DISTANCE	200m
WEIGHT	130g



CAT NO	LENS-EX7R	LENS-EX7	LENS-IL7R	LENS-IL7
MODEL	EX7R	EX7	IL7R	IL7
RATING	ATEX	ATEX	-	-
BATTERY	Rechargeable Battery pack 3.7V	(3) AA batteries	Rechargeable Battery pack 3.7V	(3) AA batteries
BATTERY LIFE	Min: 10 hours / Max: 45 hours	Min: 16 hours / Max: 45 hours	Min: 6 hours / Max: 40 hours	Min: 7 hours / Max: 37 hours
LUMENS	220 lumens	200 lumens	360 lumens	340 lumens
SAFETY RATING	ATEX (Zone 0/20)	ATEX (Zone 0/20)	ATEX (Zone 2/22)	ATEX (Zone 2/22)
WEIGHT	228g	232g	228g	232g

LedLenser Hand Held Lighting

XP30R

CAT NO	LENS-XP30R
BATTERY	18V Bosch Professional Battery
BATTERY LIFE	Min: 0.5 hours / Max: 16 hours
LUMENS	Up to 34,000 lumens
BEAM DISTANCE	Up to 2200 m
WEIGHT	3.12 kg



P18R

CAT NO	LENS-P18R
BATTERY	Rechargeable Lithium-Ion Battery
BATTERY LIFE	Min: 2.5 hours / Max: 70 hours
LUMENS	4500 lumens
BEAM DISTANCE	720m
WEIGHT	669g



X21R

CAT NO	LENS-X21R-3
BATTERY	9.6V Rechargeable Ytrion Cell
BATTERY LIFE	Min: 2 hours / Max: 40 hours
LUMENS	5000 lumens
BEAM DISTANCE	800m
WEIGHT	1.315kg



ML6 RECHARGEABLE LANTERN

CAT NO	LT-3016
BATTERY	Rechargeable Li-ion Battery 18650, 3.7V
BATTERY LIFE	Max: 70 hours, Min: 4 hours
LUMENS	Max: 750, Min: 20
WEIGHT	280g including battery



ML4 RECHARGEABLE LANTERN

CAT NO	LT-3136
BATTERY	Rechargeable Li-ion Battery 14500, 3.7V
BATTERY LIFE	Max: 45 hours, Min: 3 hours
LUMENS	Max: 300, Min: 5
WEIGHT	71g including battery

New from Ledlenser! A digital focusing headtorch that automatically provides the right light for any application, world leading light technology to make you safer and the work easier.

NEW

LedLenser Head Torches



LENS-HF4R-WORK



LENS-HF6R-WORK



LENS-HF8R-WORK



LENS-HF4R-CORE



LENS-HF6R-CORE



LENS-HF8R-CORE

CAT NO	LIGHT OUTPUT	DISTANCE	SAFETY RATING	BATTERY TYPE	RUN TIME	WEIGHT
LENS-HF4R-WORK	<500 lumens	130m	IP68	Rechargeable Lithium-Ion Battery	Min: 2.5h / Max: 35h	200g
LENS-HF6R-WORK	<800 lumens	160m	IP68	Rechargeable Lithium-Ion Battery	Min: 3h / Max: 60h	334g
LENS-HF8R-WORK	<1600 lumens	210m	IP68	Rechargeable Lithium-Ion Battery	Min: 3.5h / Max: 90h	488g
LENS-HF4R-CORE	<500 lumens	130m	IP68	Rechargeable Lithium-Ion Battery	Min: 2.5h / Max: 35h	169g
LENS-HF6R-CORE	<800 lumens	160m	IP68	Rechargeable Lithium-Ion Battery	Min: 3h / Max: 60h	272g
LENS-HF8R-CORE	<1600 lumens	210m	IP68	Rechargeable Lithium-Ion Battery	Min: 3.5h / Max: 90h	383g

LedLenser Head Torches



LENS-H15R



LENS-H5



LENS-MH10



LENS-IH9R



Powercase
Compatible with MH4, MH5, MH7,
MH8, ML4, iH5R and iH9R



LENS-IH11R



LENS-ILH8 / LENS-EXH8



LENS-IH5R




LENS-ILH8R / LENS-EXH8R

CAT NO	LIGHT OUTPUT	DISTANCE	SAFETY RATING	BATTERY TYPE	RUN TIME	WEIGHT
LENS-H15R	2500 lumens	250m	-	Rechargeable Lithium-Ion Battery	Min: 5h / Max: 80h	380g
LENS-H5	350 lumens	160m	-	(2) AA Batteries	Min: 2h / Max: 20h	178g
LENS-MH10	600 lumens	150m	-	Rechargeable Lithium-Ion Battery	Min: 10h / Max: 120h	158g
LENS-IH5R	400 lumens	180m	-	Rechargeable Lithium-Ion or (2) AA Batteries	Min: 40h / Max: 180h	98g
LENS-IH9R	600 lumens	200m	-	Rechargeable Lithium-Ion Battery	Min: 3.5h / Max: 40h	139g
LENS-IH11R	1000 lumens	320m	-	Rechargeable Lithium-Ion Battery	Min: 4h / Max: 100h	179g
LENS-ILH8	280 lumens	80m	-	(3) AA Batteries	Min: 9h / Max: 38h	345g
LENS-ILH8R	300 lumens	160m	-	Rechargeable Lithium-Ion Battery	Min: 7h / Max: 40h	342g
LENS-EXH8	180 lumens	120m	ATEX	(3) AA Alkaline 1.5V Batteries	Min: 15h / Max: 40h	345g
LENS-EXH8R	200 lumens	130m	ATEX	1 x 18650 Rechargeable Battery Pack 3.7v	Min: 10h / Max: 45h	342g

I-Series work light range from Led Lenser. Small, sophisticated and full of power; the I-Series work lights are powerful and flexible. Adjustable base, magnet and hook for mounting allow positioning flexibility. Easily charged via magnetic charge system plus a range of other great features make for a fantastic work light.



CAT NO	LENS-IF2R	LENS-IF3R	LENS-IF4R	LENS-IF8R
MODEL	IF2R	IF3R	IF4R	IF8R
BATTERY	Rechargeable Lithium-Ion Battery	Rechargeable Lithium-Ion Battery	Rechargeable Lithium-Ion Battery	Rechargeable Lithium-Ion Battery
BATTERY LIFE	Min: 3 hours / Max: 6 hours	Min: 1.5 hours / Max: 15 hours	Min: 1.5 hours / Max: 15 hours	Min: 1.25 hours / Max: 12 hours
LUMENS	200 lumens	1000 lumens	2500 lumens	4500 lumens
WEIGHT	88g	392g	1.06kg	1.74kg

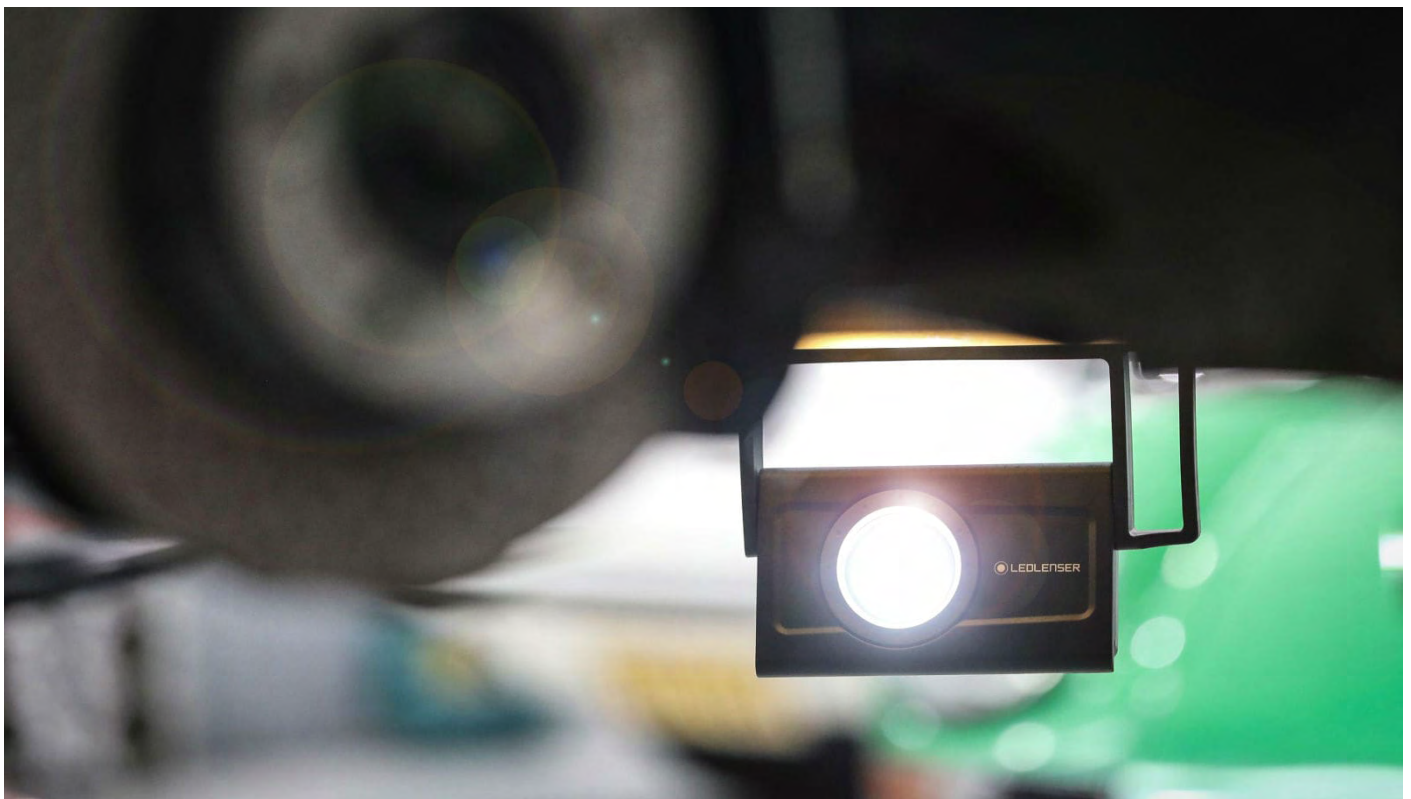



NEXT GENERATION

- Increased light output
- Longer run time
- Battery status indicator



Safety beacons for the 21st century - Versatile, compact and practically indestructible Eflare LED flares and warning lights will see your workers through the darkest of nights. Eflare safety beacons are visible from over 1km at night, so you can feel confident working in even the most challenging, low-visibility conditions. The Eflare beacons are available for a range of industries, Emergency Services, Rail, Utilities, Industrial, Aviation and Military.

Eflare Beacons are compliant with the publications IEC 60079 Part 0 (General requirements) and Part 11 (Intrinsic Safety "i") and as listed below:

- > IEC60079-0: 2011 Edition 6.0
- > IEC60079.11: 2011 Edition 6.0
- > IEC60529: 2001 Edition 2.1

Eflare accreditation

- > Accreditation Level - Ex ic IIC T4 Gc IP66
- > ATEX Certificate No. - ITS10ATEX27129
- > IECEx Certificate No. - IECEx TSA 11.0023
- > IP66 Rated



CAT NO	UB290	UB700	UB280	TB10
MODEL	UB290	UB700	UB280	TB10R
LIGHT COLOUR	Various	Various	Various	Red
CANDELA	70 - 85cd	70 - 85cd	70 - 85cd	Flash: 25
HEIGHT	200mm	200mm	150mm	130mm
FLASH RATE	175fpm	175fpm	175fpm	165-185 fpm
BATTERY	(4) AA Batteries	(2) D Cell Batteries	(4) AA Batteries	(1) AA Battery
BATTERY LIFE	30+ hours	80+ hours	30+ hours	25+ hours
WEIGHT	260g	450g	240g	100g

Eflares come in several colours and colour combinations for example Red, Blue Amber, Green, White (dual colour also available). Can be steady on, flash only or both.

Eflare Beacons are backed by an industry-leading 5 year warranty



Eflare Accessories



Eflare Rubber Base Mount
500-017



Eflare Aviation Base Mount
500-065



Eflare Cone Clip
500-037



Eflare Magnetic Base Cap
500-067



Eflare Carry Bags
500-048 Small
500-160 Large



Eflare Magnetic Clip
500-059



Eflare Compact Magnetic Base Cap
500-161



Eflare Rail Base Mount
500-166



NEXT GENERATION

A new generation of
INTRINSICALLY SAFE beacons

NEW






SCANGRIP®

INNOVATION FROM DENMARK



SCANGRIP CONNECT Area Lights

The new SCANGRIP CONNECT work lights provide access for all professional users to benefit from SCANGRIP's work lights no matter what batteries and power tool brand the user normally prefers. The SCANGRIP CONNECT work light series is compatible across all leading power tool brands, that is MAKITA, BOSCH, DEWALT, MILWAUKEE, BOSCH GREEN, EINHELL, FEIN, FESTOOL, FLEX, HAZET, HIKOKI, INGERSOLL, METABO, RIDGID, SNAP-ON, and WURTH with more to come!



Simply order your Scangrip light with your preferred 18V battery platform connector and slot the battery into the back of the light.



CAT NO	03.6100C	03.6101C	03.6102C
MODEL	NOVA 2 CONNECT	NOVA 4 CONNECT	NOVA 10 CONNECT
BATTERY LIFE	3-31h with 18V 5.2Ah battery	3-31h with 18V 5.2Ah battery	1.25 hours with 18V 5.2Ah battery
LUMENS	2000 lumens	4000 lumens	10,000 lumens
WEIGHT	0.72kg	2.35kg	3.72kg



AREA 6 CONNECT

AREA 10 CONNECT

CAT NO	03.6108C
BATTERY LIFE	22h with 18V 5.2 Ah battery
LUMENS	6000 lumens
WEIGHT	1.97kg

CAT NO	03.6103C
BATTERY LIFE	6.5h with 18V 5.2 Ah battery
LUMENS	10,000 lumens
WEIGHT	3.7kg

SCANGRIP area lights are extremely durable and made to last. The entire product line is sturdy and endures the really demanding working environment which expose both the professional worker and their tools to rough, wet, and dirty conditions. The lights are covered by a high IP protection rating to resist outdoor use in all kinds of weather. Unique design allows your light to be portable, rechargeable, with exchangeable batteries or with a cable.



Replaceable Battery



CAT NO	03.6000	03.6001	03.6002
MODEL	NOVA 4 SPS	NOVA 6 SPS	NOVA 10 SPS
BATTERY	Rechargeable Lithium-Ion Battery	Rechargeable Lithium-Ion Battery	Rechargeable Lithium-Ion Battery
BATTERY LIFE	Up to 15 hours	Up to 20 hours	Up to 10 hours
LUMENS	4000 lumens	6000 lumens	10000 lumens
WEIGHT	1.97kg	2.69kg	3.6kg



NOVA R

CAT NO	03.5456
BATTERY	Rechargeable Lithium-Ion Battery
BATTERY LIFE	Up to 20 hours
LUMENS	2000 lumens
WEIGHT	705g



AREASPS10

CAT NO	03.5618
BATTERY	Rechargeable Lithium-Ion Battery
BATTERY LIFE	Up to 10 hours
LUMENS	4000 lumens
WEIGHT	3.5kg

High efficiency
360° area
work light with
exchangeable
battery

SCANGRIP Lights & Accessories



CAT NO	03.5606	03.5600	03.5611	03.5618
MODEL	EX-VIEW	UNI-EX	MIDI-EX	NOVA-EX R
BATTERY	Rechargeable Li-Ion Battery	Rechargeable Li-Ion Battery	Rechargeable Li-Ion Battery	Rechargeable Li-Ion Battery
BATTERY LIFE	Up to 3.5 hours	Up to 6 hours	Up to 5 hours	Up to 5 hours
RATING	ATEX	ATEX	ATEX	ATEX
LUMENS	200 lumens	290 lumens	280 lumens	4000 lumens



Large Magnetic Bracket
03.5391



EX Magnet Bracket
03.5616



Dual Bracket for Tripod
03.5308



Scangrip Tripod
03.5431



SCANGRIP DIFFUSER
03.5750



Scaffolding Bracket
03.5341



SCAFFOLDING BRACKET EX
03.5609



FOX FURY[®]
LIGHTING SOLUTIONS



FoxFury Scene Lights

These portable LED area/scene lights are waterproof, rechargeable and cordless, making them suitable for use in a variety of circumstances/industries. They are fire and impact resistant which is ideal for use within the emergency services & electrical utilities. The lights are rugged, portable, compact and self-contained allowing for easy and safe transportation.

Improved colour accuracy with a high CRI rating of 92!



Nomad Now Utility Mount
FF-85-048



Nomad Now Magnetic Mount
FF-85-040



Nomad Now Horizontal Right-Angle Mount
FF-85-046



Nomad Prime Diffuser Lens, Amber
FF-85-052



Nomad Prime Diffuser Lens, Red
FF-85-050



LIGHT OUTPUT

MODE	LUMENS	RUN TIME
High	3,300	3 hours
Medium	1,200	9 hours
Low	550	24 hours

LIGHT OUTPUT

MODE	LUMENS	RUN TIME
High	5,600	3 hours
Medium	2,000	9 hours
Low	672	24 hours
Blink	5,600	9 hours

LIGHT OUTPUT

MODE	LUMENS	RUN TIME
High	8,800	3 hours
Medium	2,400	9 hours
Low	990	24 hours
Blink	8,800	10 hours

LIGHT OUTPUT

MODE	LUMENS	RUN TIME
High	17,600	3 hours
Medium	7,000	9 hours
Low	3,300	24 hours

CAT NO	FF-200-400-100	FF-200-800	FF-200-900	FF-200-1200
MODEL	NOW	PRIME	360	TRANSFORMER
BATTERY	Li-ion Rechargeable	Li-ion Rechargeable	Li-ion Rechargeable	NiMH Rechargeable
CHARGE TIME	4 hours	5 hours	7 hours	8 hours
EXTENSION HEIGHT	8.7 in (221mm)	8ft (2.4m)	8.5ft (2.6m)	12.9ft (3.9m)
TILT ANGLE	45° (either direction)	115°	120°	90°
WEIGHT	2 kg	8.3 kg	11.1 kg	24.25 kg




Nomad Prime Diffuser Cap & Colour Bands
FF-850-080



Nomad 360 Colour Bands
FF-85-070



Nomad Prime Replacement Batteries
FF-600-200-800



Nomad 360 Replacement Batteries
FF-600-200-900



Nomad Now & Prime Replacement Charger
FF-600-120




Nomad 360 Replacement Charger
FF-600-120

FoxFury Right Angle Lights

FoxFury's versatile hybrid right-angle lights feature a clip for pocket, belt or chest wear. These search tools are durable, fire resistant and completely waterproof.



CAT NO	FF-380-BTS-BL	FF-380-BT2P-BLR	FF-380-FF01-BT2-BL
MODEL	BTS	BT2+ HYBRID	BT2-IS INTRINSIC HYBRID
BATTERY	(4) AA batteries	Rechargeable battery or (4) AA batteries	(4) AA batteries
BATTERY LIFE	3 - 12 hours	2 - 8 hours	3 - 12 hours
LUMENS	80 - 400 Lumens	100 - 700 Lumens	40 - 200 Lumens
BEAM DISTANCE	2,123 ft (647 m)	5,600 ft (1,707 m)	3,000 ft (914 m)
WEIGHT	590 g (with battery)	680 g (with rechargeable battery)	680 g (with battery)

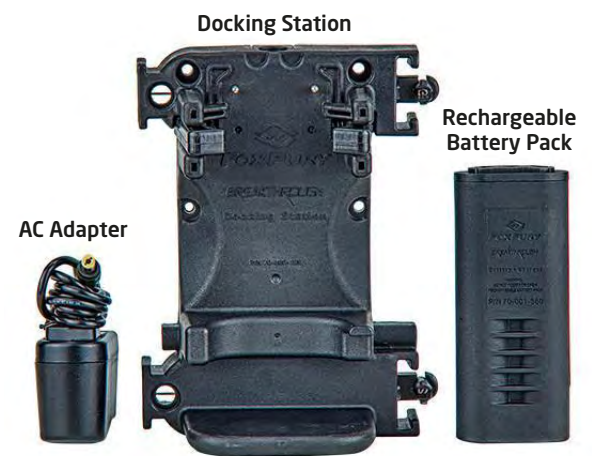

CAT NO	FF-600-380BT
MODEL	BT RECHARGEABLE KIT
WEIGHT	298 g

FoxFury Head Torches

FoxFury's wide-angle LED headlamps and helmet lights provide panoramic lighting for immediate situation assessment. Powerful side-mounted LED helmet lights with custom adaptors also available. Rear safety LED (available on most models) helps user be seen at night.



COMMAND+ TILT WHITE & AMBER
LED HEADLAMP / HELMET LIGHT

CAT NO	FF-420-T15
BATTERY	(4) AA batteries
BATTERY LIFE	Up to 14 hours
LUMENS	100 Lumens
BEAM DISTANCE	114 ft (35 m)
WEIGHT	272 g



PERFORMANCE INTRINSIC TASKER
LED HELMET LIGHT

CAT NO	FF-400-FF417-2
BATTERY	(4) AA batteries
BATTERY LIFE	Up to 8 hours
LUMENS	54 Lumens
BEAM DISTANCE	71 ft (22 m)
WEIGHT	318 g



COMMAND+ TILT WHITE LED
HEADLAMP / HELMET LIGHT

CAT NO	FF-420-T09
BATTERY	Rechargeable NiMH Battery or (4) AA batteries
BATTERY LIFE	Up to 14 hours
LUMENS	100 Lumens
BEAM DISTANCE	114 ft (35 m)
WEIGHT	272 g



COMMAND+ TILT WHITE & GREEN
LED HEADLAMP / HELMET LIGHT

CAT NO	FF-420-T06
BATTERY	(4) AA batteries
BATTERY LIFE	Up to 14 hours
LUMENS	100 Lumens
BEAM DISTANCE	114 ft (35 m)
WEIGHT	272 g

The Scout Clip Light with White LEDs is a versatile product that serves as a utility light, task light, search light, and more. It's rugged, works in all weather, and is fully submersible. The Scout models have a secure J-Clip that enables multi-wear use options. The light runs on 3 AA batteries. Scout lights are available in black or orange.



CAT NO	FF-301-010	FF-301-004	FF-301-312
MODEL	SCOUT CLIP LIGHT WITH WHITE LEDS	SCOUT CLIP LIGHT WITH WHITE & RED LEDS	SCOUT CLIP LIGHT - FORENSIC BLUE
BATTERY	(3) AA batteries (included)	(3) AA batteries (included)	(3) AA batteries (included)
BATTERY LIFE	12 - 50 hours	12 - 60 hours	12 hours
LUMENS	17 - 65 Lumens	10 - 49 Lumens	470nm Wavelength
WEIGHT	153 g	153 g	153 g



RUGO™ R1 DRONE AND CAMERA LIGHT

T.E.D.D. TACTICAL ELECTRONIC DISTRACTION DEVICE

CAT NO	FF-700-301
BATTERY	Rechargeable Lithium-Ion Battery
BATTERY LIFE	1 - 6.75 hours
LUMENS	70 - 620 Lumens
BEAM DISTANCE	76 ft (23 m)
WEIGHT	158 g



RUGO™ Quick Swap® Power Pack
FF-N50-200

The Tactical Electronic Distraction Device - T.E.D.D. is for use in training, riots, SWAT, Corrections and should be used only by trained professionals. The T.E.D.D. has a solid steel base, high temperature poly-carbonate side, and nylon top cover. The heavy base is designed to right itself when overturned. It is submersible to 10 ft (3.3 m) and is impact resistant. It is programmable with 8 Light & Sound Modes and 4 activation delays.



RUGO™ Drone Mounts For DJI PHANTOM 4
FF-85-027



RUGO™ Handlebar/ Drone Mount
FF-85-026



RUGO™ Quick Swap® Power Pack with Strobe
FF-N50-220

CAT NO	FF-750-500
SOUND	120dB (at 1m) 3kHz
BATTERY	Rechargeable Lithium-Ion Battery
BATTERY LIFE	60 minutes
LUMENS	2600 Lumens
WEIGHT	500 g





JCB TUFFDUAL

CAT NO	JCB-SL-TUFFDUAL
BATTERY	Rechargeable Lithium-Ion Battery
RUNTIME	Up to 12 hours
LUMENS	2500 lumens
IP RATING	IP65 WATER / DUSTPROOF / IK07
WEIGHT	3.1kg

2500 lumen site light that can be powered by mains 110V / 240V or by its internal rechargeable Li-ion battery, complete with a stand that is tripod mountable. Built-in USB power bank. The outer casing is both chemical and oil resistant making it suitable for most site applications and conditions.



TUFF TWIN FOLD

CAT NO	TF1500R
LUMENS	1500
RUNTIME	Up to 3 hours (dimable for longer times)
IP RATING	IP54
WEIGHT	1.56kg

The TUFF TWIN FOLD offers a 1500 lumen output through an anti-glare diffused lens for wide angle shadow-free light. It uses a 3.7V 8800mAh rechargeable Li-ion battery with a charging time of 5 hours at 5V 2A, or 10 hours at 5V 1A. The light offers a runtime of 2 hours at 100%, 3 hours at 50% or fully dimmable for longer runtimes. The TWIN FOLD opens to 290° and is waterproof to IP54, it is supplied with an ABS heavy duty case and 3M cable complete with CEE plug.



TOUGH ONE RECHARGEABLE WORK LIGHT

CAT NO	JCB-WL-TOUGH-ONE
LUMENS	1500 lumens
RUNTIME	3 hours 100%; 6 hours 50%
CHARGE TIME	4 hours
BEAM DISTANCE	15 metres
IP RATING	IP68
WEIGHT	1kg

Micro USB Charging Point
Battery Charge Indicator
Built in Magnetic Stand

IP68 Dust & Weatherproof
Micro USB Charging Lead
Tripod Mountable



20W LED RECHARGEABLE FLOODLIGHT

CAT NO	JCB-FL20S
LUMENS	2000 lumens
RUNTIME	6-7 hours
CHARGE TIME	3-4 hours
BATTERY	1 x 22.2V 4.4Ah
IK RATING	IK09
WEIGHT	3.1kg



40W LED RECHARGEABLE FLOODLIGHT

CAT NO	JCB-FL40S
LUMENS	4000 lumens
RUNTIME	3-3.5 hours
CHARGE TIME	3-4 hours
BATTERY	1 x 22.2V 4.4Ah
IK RATING	IK09
WEIGHT	3.1kg

CHOOSE YOUR LIGHT BODY, POWER IT YOUR WAY

ADD ONE OF THESE POWER SOURCES



JCB 4-IN-1 POWERTOOL ADAPTOR
JCB-ADAPT-4.1

- Can be mounted onto the JT series site lights in place of the rechargeable 22.2V li-ion battery



JCB 5-IN-1 POWERTOOL ADAPTOR
JCB-ADAPT-5.1

- Can be mounted onto the JT series site lights in place of the rechargeable 22.2V li-ion battery



JCB 22.2V BATTERY
JCB-B22.2V4.4AH

- Power 22.2V 4.4Ah Li-ion re-chargeable battery
- 2 settings via switch 100%, 50%
- Up to 8 hours runtime based on 2000 lumens
- Charge time 3-4 hours
- For use with JT and Xtreme series



50W LED RECHARGEABLE INDUSTRIAL TASK LIGHT

The LED Rechargeable Industrial Task Light is 50W offering up to 4000 lumens light output. The light is available with a 14.8V battery delivering a runtime of up to eight hours from a 4-6 hour charge time. The product is supplied with a sturdy mounting bracket and has a 100% or 50% mode for brightness.

CAT NO	JCB-IT50
LUMENS	4000 lumens
RUNTIME	High: 2-2.5 hours / Low: 7-8 hours
CHARGE TIME	5-6 hours
BATTERY	1 x 14.8V 5200mAh
WEIGHT	2.5kg



Magnetic base allows flexibility in light positioning

GLOBE LIGHT

CAT NO	JCB-PT55
LUMENS	600 lumens
RUNTIME	3.5 hours
CHARGE TIME	5 hours
BATTERY	3.7V 4000mAh
WEIGHT	400g



20W LED RECHARGEABLE POWER LIGHT

CAT NO	JCB-PLT20
LUMENS	2000 lumens
RUNTIME	6-7 / 12-14 hours (1 / 2 Batteries)
CHARGE TIME	3-4 hours
BATTERY	2 x 22.2V 4.4Ah
IK RATING	IK09
WEIGHT	3.9kg



40W LED RECHARGEABLE POWER LIGHT


CAT NO	JCB-PLT40
LUMENS	4000 lumens
RUNTIME	3-3.5 / 6-7 hours (1 / 2 Batteries)
CHARGE TIME	3-4 hours
BATTERY	2 x 22.2V 4.4Ah
IK RATING	IK09
WEIGHT	3.9kg



JCB 22.2V BATTERY
JCB-B22.2V4.4AH

- Power 22.2V 4.4Ah Li-ion re-chargeable battery
- 2 settings via switch 100%, 50%
- Up to 8 hours runtime based on 2000 lumens
- Charge time 3-4 hours
- For use with JT and Xtreme series

**Medium Duty
1.5m Tripod**
T1.5

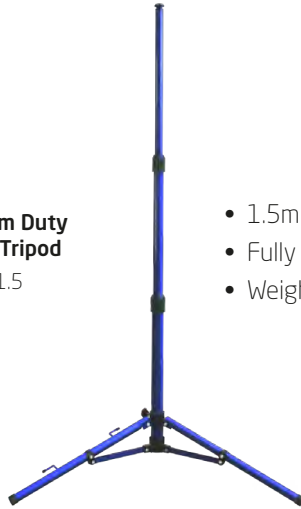

- 1.5m Working Height
- Fully Adjustable
- Weight: 5Kg



JCB 4-IN-1 POWERTOOL ADAPTOR
JCB-ADAPT-4.1

- Can be mounted onto the JT series site lights in place of the rechargeable 22.2V li-ion battery



**TUFF-T400 240V Mains Charger for
22.2V Li-ion Battery**
T4000-CH

**JCB ADJUSTABLE
TRIPOD**
JCB-TRIP



- 1.682m Working Height
- Fully Adjustable
- Weight: 3.34Kg



JCB 5-IN-1 POWERTOOL ADAPTOR
JCB-ADAPT-5.1

- Can be mounted onto the JT series site lights in place of the rechargeable 22.2V li-ion battery

GP Power banks - built for ultra-fast power transmission, it charges your phone to over 55% in just 30 minutes. Keep your devices powered reliably with ease thanks to its 6 safety protections, keeping your devices safe from over-charge, short circuits, over-heating and other possible hazards.



GP PowerBank 10000mAh Blue
MP10MA



GP PowerBank 20000mAh Blue
MP20MA





Peli 9430 Portable Outdoor Floodlight

- 360 Degree Rotatable Head
- 180 Degree Pivot Head
- Retractable Mast
- IP54 Rated
- 6 X LED Light Source
- Sealed Lead Acid (SLA) Rechargeable Battery



CAT NO	9430C
LUMENS	1500 (Low); 3000 (High)
RUNTIME	Low 15 hours; High 8 hours
CHARGE TIME	5 hours
COLOUR	Yellow & Black
DIMENSIONS	40 x 20 x 23cm
HEIGHT	Max 82cm
WEIGHT	10.3kg



Peli 9440 Rechargeable Remote Area Light

- Wide Beam Spread
- IP65 Rated
- 12 X LED Light Source
- Lithium-ion Rechargeable Battery



CAT NO	9440
LUMENS	1500 (Low); 2800 (Med); 5300 (High)
RUNTIME	Low 8 hours; Med 4 hours; High 1 hour 50 mins
CHARGE TIME	3 hours 45 mins
COLOUR	Yellow & Black
DIMENSIONS	20 x 90cm (closed)
HEIGHT	Max 215.9cm
WEIGHT	7.3kg



Peli 9455 Portable Floodlight

Suitable for use in Hazardous Environments

- 360 Degree Rotatable Head
- Retractable Mast
- IP54 Rated
- ATEX Certified
- 10 X LED Light Source
- NiMH Rechargeable Battery



CAT NO	9455Z0
LUMENS	800 (Low); 1600 (High)
RUNTIME	Low 8 hours; Med 4 hours; High 1 hour 50 mins
CHARGE TIME	8 hours
COLOUR	Yellow
DIMENSIONS	39 x 20 x 23cm
HEIGHT	Max 80cm
WEIGHT	7.3kg



Peli 9460 Portable Floodlight

Portable Floodlight, Housed in a Peli Case

- 360 Degree Rotatable Head
- Retractable Mast
- IP54 Rated
- Dual Head 10 X LED Light Source (Per Head)
- Sealed Lead Acid (SLA) Rechargeable Battery



CAT NO	9460
LUMENS	12,000
RUNTIME	Low 24 hours; High 3 hours
CHARGE TIME	8 hours
COLOUR	Yellow & Black
DIMENSIONS	59.1 x 35.6 x 23.5cm
HEIGHT	Max 201cm
WEIGHT	27.7kg



GALAXY PRO 6K

CAT NO	NSGALAXYPRO-6K
BATTERY	Rechargeable Lithium-Ion Battery
BATTERY LIFE	2.5 - 60 hours
LUMENS	6000 lumens
BEAM DISTANCE	60m
WEIGHT	1.5kg



SOLARIS PRO RECHARGEABLE LIGHT SYSTEM

CAT NO	NS-SOLARISPRO
BATTERY	Rechargeable Lithium-Ion Battery
BATTERY LIFE	48 hours
LUMENS	16,000 lumens
BEAM DISTANCE	500m
WEIGHT	7 - 8.5kg



PROSTAR & PROSTAR LITE

- 2-in-1 searchlight and floodlight
- 10000 lumen light output
- 1200 metre beam
- Maximum runtime 25 hours
- Adjustable 90° tilting head
- Features a wall mountable charging base

CAT NO	PROSTAR	PROSTAR LITE
BATTERY	Rechargeable Lithium-Ion Battery	Rechargeable Lithium-Ion Battery
BATTERY LIFE	2 - 25 hours	1.5 - 18 hours
LUMENS	10,000 lumens	10,000 lumens
BEAM DISTANCE	1200m	1200m
WEIGHT	1.8kg	1.5kg

Other Lighting

Other products from these ranges are available upon request.



DML809

CAT NO	DML809
BATTERY	2X 18V LXT® Lithium-Ion
BATTERY LIFE	1.7 / 4.5 / 8.5 hours
LUMENS	10,000 / 4,000 / 2,000 lumens
WEIGHT	6.99kg



DML811

CAT NO	DML811
BATTERY	18V LXT® Lithium-Ion
BATTERY LIFE	3 / 7 / 13 hours
LUMENS	3,000 / 1,500 / 750 lumens
WEIGHT	4.72kg



M18 HOSALC

CAT NO	M18-HOSALC
BATTERY	All MILWAUKEE® M18™ batteries
BATTERY LIFE	75 / 3.5 / 2.5 hours
LUMENS	1700 / 4000 / 6000 lumens
WEIGHT	11.1kg



M18 UBL (UTILITY BUCKET LIGHT)

CAT NO	M18-UBL
BATTERY	All MILWAUKEE® M18™ batteries
BATTERY LIFE	6 / 4 / 4 hours
LUMENS	800 / 2200 / 2500 lumens
WEIGHT	4.3kg



GLI 18V-10000 C PROFESSIONAL

CAT NO	GLI-18V-10000
BATTERY	18V
BATTERY LIFE	12.5 mins/Ah
LUMENS	10,000 lumens
WEIGHT	3.9kg



BOSCH



GLI 18V-2200 C PROFESSIONAL

CAT NO	GLI-18V-2200
BATTERY	14.4-18 V
BATTERY LIFE	100 mins/Ah
LUMENS	2,200 lumens
WEIGHT	1.9kg

Designed for use on electrified power lines for the purpose of demarking residual electrical hazards and/or limits of isolation.

Each product has reflective signage carrying word "Danger". Other wording available. Individual lightweight blue LED lights are attached to each sign which can be set to either flash or be steady-on mode. Fitted with 2 lithium coin cell batteries, the lights will work for up to 240 hours in flash mode, or 100 hours in steady-on mode.



OVERHEAD
SIGN

Designed to be attached directly on to an overhead line using a snap on style earthing clamp (Catu) using operating rods, the sign and light has a swivel connection to allow free movement.

CAT NO	DESCRIPTION
NWR-DEM-OH-SIGN-AL-D	Overhead Sign - Danger
NWR-DEM-VM-SIGN-AL-D	Vertical Mount Sign - Danger
NWR-DEM-CONE-SIGN-AL-D	Cone Mounted Sign - Danger



VERTICAL MOUNT
SIGN

Can easily be mounted on to any metallic structure with magnets attached to the back of the sign.




CONE MOUNTED
SIGN

Comes with a specially designed flexible sleeve on the back of the sign which slips easily over the cone.

750mm tall weighted blue/ white cone can be purchased separately.

Rotate Lens to
Turn ON or OFF

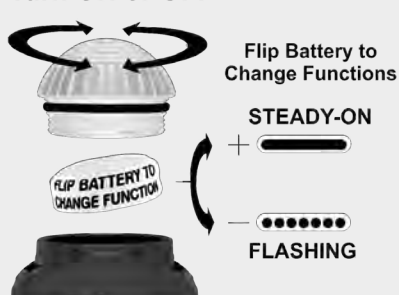

Specialist Demarcation Lights & Signs

Designed for use on electrified power lines for the purpose of demarking residual electrical hazards and/or limits of isolation.

Each product has reflective signage carrying word "Danger". Other wording available. An E-flare Beacon with Blue LEDs is attached to each sign which can be set to either flash or be continuously on.



OVERHEAD
SIGN

Designed to be attached directly on to an overhead line using a snap on style earthing clamp (Catu) using approved operating rods, the sign and light has a swivel connection to allow free movement.

CAT NO

NWR-DEM-OH-SIGN-EF-D

NWR-DEM-VM-SIGN-EF-D

NWR-DEM-CONE-SIGN-EF-D

AT700B

DESCRIPTION

Overhead Sign - Danger

Vertical Mount Sign - Danger

Cone Mounted Sign - Danger

Eflare Blue Flash/Solid



VERTICAL MOUNT
SIGN

Can easily be mounted on to any metallic structure with magnets attached to the back of the sign.



CONE MOUNTED
SIGN

Comes with a specially designed flexible sleeve on the back of the sign which slips easily over the cone.

750mm tall weighted blue/white cone can be purchased separately.



EFLARE UB700B SAFETY BEACON

The UB700B Beacon is lightweight and easy to deploy. Visible at a distance of over 1km. The standard unit will last 63 hours at full strength, using standard D cell batteries, IP66 rated and is not affected by electromagnetic fields. The standard units have a flash rate of 0.9 flashes per second. They are intrinsically safe. The beacons are easily operated by rotating the lens in a clockwise direction to activate the switch and anti-clockwise to turn off. The units are designed to maintain constant peak brightness of its LEDs over the life of the batteries. A Low Battery Indicator will start to flash when it is time to change the batteries. The LBI will continue to flash with the other LEDs.

Portable AC RoLE integrated hazard warning sign with built in LED lighting.

The Industrial Beacon is designed to hang on an overhead line for demarking residual electrical hazards and/or limits of isolation.

Combining the latest LED technology with high visibility signage.

Specified to have a run time in excess of 72 hours, during testing a run time in excess 120 hours was achieved.

The housing is manufactured from lightweight, durable impact resistant, polycarbonate. Signage indicates the electrical hazard symbol with optional wording of "Danger".

The flashing blue LEDs are designed to face downwards to enhance visibility from the ground.

Visible day or night, a light sensor controls the brightness allowing the unit to shine brightest during daylight, saving battery life during the hours of darkness.


Emitting a light pulse of 1-2Hz the IRB is visible at 25m in daylight.

The IRB has four additional LEDs to indicate the status of the battery. One red, one amber, two green.



CAT NO	RBD22B
POWER SOURCE	6 * "C" cell batteries – recommended NiMH 5000mAh suitable NiMH 4500mAh, Duracell PRO-CELL (or very high quality equivalent)
LIGHT OUTPUT COLOUR	Blue 465 – 485nm
LIGHT OUTPUT RANGE	Greater than 25m
FLASH RATE	1 – 2Hz
RUN TIME	Greater than 72 hours continuous with 6 * NiMH "C" cells fully charged
OPERATING HEIGHT	>3m
DIMENSIONS	Body diameter 22cm, width 4.6cm
WEIGHT	1.12kg with NiMH batteries, 0.62kg without batteries

CAT NO	DESCRIPTION
NWR-RBD22B-D	Industrial Beacon - Danger

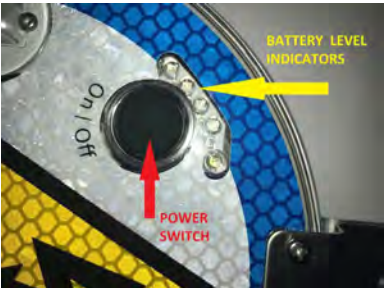

Battery indicator

Four LEDs (one red, one amber, two green) = full charge

Three LEDs (one red, one amber, one green) = battery good

Two LEDs (one red, one amber) = batteries need changing soon

One LED (red) = batteries almost depleted, change immediately, replace or recharge batteries as required



[illegible]

[illegible]



Horizon Utility Supplies Ltd
Unit 1, Windmill Business Park
Windmill Road
Clevedon
Somerset
BS21 6SR
United Kingdom

Tel: +44 (0)1275 342700
Email: enquiries@hor-i-zon.com

www.HorizonUtilitySupplies.com