


HORIZON FEATURED PRODUCTS

CATALOGUE 2021/2022

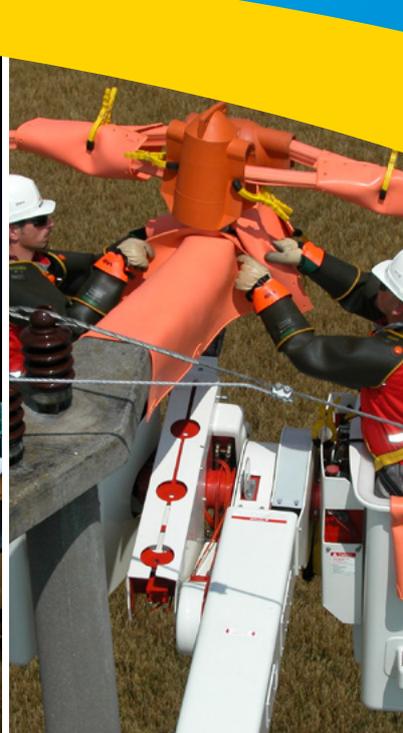

Welcome

Welcome to the Horizon Featured Products Catalogue 2021/22

Established in 1996, Horizon specialises in supplying equipment for working live on power lines and cables. Since that time, our product range has evolved into the most comprehensive in the industry. We work with our clients to solve problems that they encounter with tools and equipment to make their jobs safer, easier and more efficient.

This featured product catalogue demonstrates an array of the latest tools and equipment that we supply within the electrical utility sector, including the latest innovations from our suppliers.

Horizon Utility Supplies have the following accreditations:



Class 0 Electricians' Rubber Gloves.....	4	Branach Fibreglass Ladders.....	16
Class 1 Electricians' Rubber Gloves.....	5	Never Let Go.....	18
Klauke Orange Line Tools.....	6	Powerline Sentry.....	20
Klauke Insulated Battery Cutting Tools.....	7	Orange Tool Buckets.....	21
Klauke Insulated 18V Battery Tools.....	8	Telescopic Rods.....	22
Klauke 10.8V ML Insulated Jointers Cutter.....	9	T-RAPTOR - Telescopic Rod Adaptor.....	23
Klauke Remote Bluetooth Cutting Tool.....	10	Telescopic Measuring Rods.....	24
Klauke Ground Cutters.....	11	Wireless Inspection HD Camera Kit.....	25
Klauke Battery Cutting Tools.....	12	Dynamometers & Grips.....	26
RIDGID STRUTSLAYR.....	13	Hi-Tool Grips.....	27
LOOKOUT Voltage Detection Network.....	14	Wedge Type Tap Connectors.....	28
HDE Voltage Detection.....	15	Area Lighting.....	29



The products and specifications contained in this catalogue are subject to change without notice and Horizon Utility Supplies Ltd disclaims any and all liability for such changes. The information contained herein is provided without warranties of any kind, either expressed or implied, and Horizon Utility Supplies Ltd disclaims any and all liability for typographical, printing, or production errors or changes affecting the products and/or the specifications contained herein.

Class 0 Electricians' Rubber Gloves

Ansell's Rubber Electrical Insulating Gloves are designed for ultimate comfort, performance and safety. They are made from 100% natural rubber latex using a proprietary environmentally friendly dipping process for ultimate flexibility and dexterity. Class 0 is rated for protection up to 1000V. They are CE marked and tested and conform to EN 60903.



Single Colour Gloves

Features

- Made from 100% natural rubber latex for exceptional insulation
- Class 0
- Colour: Yellow
- Environmentally friendly dipping process
- Hand fatigue is reduced by the ergonomic hand-at-rest shape and non-splayed fingers
- Flared cuff design allows room for clothing/sleeves
- Length 14" (360mm)
- Class 0 gloves suitable for a maximum working AC voltage of 1000V
- Certified for resistance to acid (category A), Ozone (Category Z) and very low temperature (Category C)
- Conforms to EN 60903:2003
- Conforms to Arc Flash Protection Class 1 EN 61482-1-2²



CAT NO	CLASS	LENGTH	MAX USE VOLTAGE	PROOF TEST VOLTAGE	SIZES
E0-16Y-*	0	14" (360mm)	1 kV	5 kV	7-12

Protectors

Leather protective overgloves are available in gold grain goatskin for use with low voltage rubber gloves. The overgloves have an adjustable black webbing draw-strap with nylon adjustable buckle. The cuff is made of stiff, high-visibility orange vinyl fabric. Length: 12" for low voltage.



Low Voltage Overgloves

CAT NO	DESCRIPTION	SIZE
VLP-110S4C-*	Low voltage goatskin protector 12"	7-12

Class 1 Electricians' Rubber Gloves

Manufactured by DPL with specially treated, high grade, natural rubber latex compounds from DPL's own plantation. They offer superior dielectric properties, are CE marked and tested in accordance to EN 60903.



Two Colour Gloves

Designed with extra comfort and safety for the user, Linepro Gloves are manufactured with specially treated high grade natural latex compounds from DPL's own plantations.

Superior anatomical construction and low temperature flexibility results in lower hand fatigue, enhancing the wearer's comfort for longer duration.

Features

- Two colour construction makes daily inspection easier for the user
- Rolled cuff ensures the glove holds its shape
- Colour coded labels shows maximum working voltage
- Packed in opaque UV resistant bags
- Class 1
- Two-colour: black inside red/outside
- Length: 410mm (16")
- Available in sizes 8, 9, 10 and 11 (half sizes available by special request)
- Conforms to EN 60903:2003
- Maximum use voltage: 7,500V
- Electric Arc tested to IEC 61482-1-2 7kA/30cm
- Additionally certified for Resistance to Acid (Category A) and Extremely Low Temperature (Category C)



DPL-9961MC-1

CAT NO	CLASS	COLOUR	LENGTH	MAX USE VOLTAGE	PROOF TEST VOLTAGE	WITHSTAND TEST VOLTAGE	SIZES
DPL-9961MC-1	1	Black inside/red outside	16" (410mm)	7,500V	10,000V	20,000V	8, 9, 10 & 11*

*Half sizes available by special request



Klauke Orange Line Tools

Klauke's Orange Line series of battery powered hydraulic cutting and crimping tools are the world's first tools of their kind offering protection from electric shocks up to 1000V. The insulation barrier, which was developed in-house, prevents voltage discharging between tool head and tool body. Every single tool is tested for compliance with the electrical requirements of IEC 60900 in their production process. This guarantees voltage protection up to 1000V.

Klauke®



Safer Operations

Until now only insulated hand tools have been available for cutting and crimping operations. The new Klauke Orange Line now offers, for the first time, insulated battery powered cutting and crimping tools, fully compliant to the electrical requirements of IEC 60900, significantly increasing user safety.

In addition Klauke Insulated tools are a safer option to use in all applications involving potentially live parts.

Safe and Convenient

On many occasions electrical systems cannot be disconnected, so working live cannot be avoided. The Klauke Orange Line of battery cutting and crimping tools increases operator comfort by reducing the need for the use of hand operated ratchet tools. Safety is also increased as the tools are suitable for low voltage operations on cables.



Proven Functions

The tried and proven functions of our Next Generation tools remain in place.


Hence you can see all information at a glance, thanks to the integrated display. Orange Line tools also have an infinitely rotating tool head.



Klauke Insulated Battery Cutting Tools

Klauke ES20ISM

- Housing in Signal Orange for easy differentiation from standard tools
- Insulated and VDE certified to 1000V for increased safety when working on potentially live equipment
- For cutting Al/St conductors (ACSR) according to DIN EN 50182, solid Al/Cu cables according to DIN EN 60228, Class 1 and laminated copper bus bars
- Extremely robust design and lightweight
- Slim cutting head - ideal when space is critical
- All tool data at a glance, built-in display

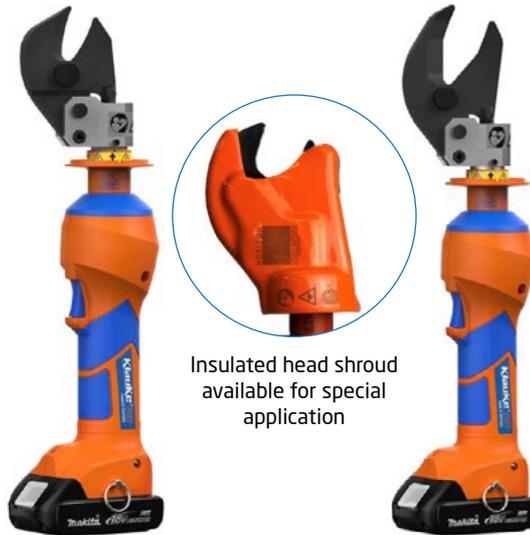

Klauke ES32ISM

- Slim cutting head - ideal when space is critical
- All tool data in view thanks to display and i-press® app
- Open head, rotatable
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- Simple and safe: Automatic retraction when operation is complete

CAT NO	ES20ISM
CUTTING FORCE	23kN
CUTTING RANGE	Max 20mm dia
WEIGHT INC BATTERY	2.1kg

CAT NO	ES32ISM
CUTTING FORCE	15kN
CUTTING RANGE	Max 32mm dia
WEIGHT INC BATTERY	2.0kg



Klauke ES25ISM

For cutting Al/St wires (ACSR), round materials (Cu, Al, St) as well as armoured cables, and stay wires

CAT NO	ES25ISM
CUTTING FORCE	67kN
CUTTING RANGE	25mm dia
WEIGHT INC BATTERY	2.9kg



Klauke ES35ISM

High cutting force for cutting copper and aluminium cables (also fine-stranded)

CAT NO	ES35ISM
CUTTING FORCE	25kN
CUTTING RANGE	35mm dia
WEIGHT INC BATTERY	2.9kg



Klauke ESM50ISM

High cutting force for cutting copper and aluminium cables (also fine-stranded)

CAT NO	ESM50ISM
CUTTING FORCE	38kN
CUTTING RANGE	50mm dia
WEIGHT INC BATTERY	3.1kg

Klauke Insulated 18V Battery Tools



New Orange Line series of Mini+ Crimping and Cutting Tools provide high power in a small lightweight tool with the additional benefit of electrical protection up to 1000V. Available in 18V Li-Ion Makita and Bosch Battery Platforms.

- Fully insulated to the electrical requirements of IEC 60900
- Data analysis via optical interface & USB adapter
- Ergonomic design for optimised centre of gravity for perfectly balanced tool
- LED illuminates work area
- More powerful motors for increased speed, performance and battery life

Klauke EK425ISM

Insulated battery powered hydraulic open head 'W' die tool

CAT NO (TOOL ONLY)	EK425ISM
CRIMPING FORCE	50kN
STROKE/OPENING WIDTH	40mm
CRIMP RANGE	Full range of 'W' dies
NUMBER OF CRIMPS	Approx 150 dependent on conductor dia
WEIGHT INC. BATTERY	3.0kg

Available in 18V Makita and Bosch Battery Platforms (Sold Separately)



Interchangeable Heads available for EK425ISM



CJ-E

EK425ISM accepts all W Dies except 'WE'. Use CJ-E for 'E' profiled crimps.



CJACSRINS

Cuts up to 20mm dia. ACSR



CJCUINS

Cuts up to 20mm dia. Cu / Al

Klauke ES20ISM

Insulated battery powered hydraulic cutting tool 20mm dia.

CAT NO (TOOL ONLY)	ES20ISM	ES32ISM
CUTTING FORCE	23kN	15kN
CUTTING RANGE	20mm dia	32mm dia
CABLE TYPES	ACSR, Cu & Al	Cu & Al
HEAD TYPE	Open scissor	Open scissor
WEIGHT INC. BATTERY	2.3kg	2.2kg

Available in 18V Makita and Bosch Battery Platforms (Sold Separately)

- Fully insulated to the electrical requirements of IEC 60900
- Compact and lightweight
- Open cutting head rotates infinitely
- Automatic retraction when the operation is complete
- Manual retraction where required



Klauke ES32ISM

Insulated battery powered hydraulic cutting tool 32mm dia.

Image shown with shrouded head - available for both models. Add suffix -WSH to Cat No

Available in 18V Makita and Bosch Battery Platforms (Sold Separately)

- Environmentally-friendly hydraulic oil, biodegradable
- Quick motor stop
- Ergonomic 2-component housing with soft grips for comfortable and safe, one hand operation
- Multifunction LED for maintenance control and analysis of data via optical interface and USB adapter
- Optimal centre of gravity

Klauke 10.8V ML Insulated Jointers Cutter

Klauke®

Orange Line Series new compact lightweight tool ideal for working in confined spaces. Developed with Jointers in mind the ES32SIS has a shortened blade profile to prevent the likelihood of catching an adjacent phase during the cutting operation. The blade pivot point has been redesigned to give maximum cutting leverage, which enables cutting of single core copper and aluminium cables of up to 400mm sq. Helps alleviate problems with arthritis and repetitive strain injuries associated with continuous use of manual ratchet cutters.

ES32SISML-WSH

Insulated battery powered hydraulic open head cutter

- Fully insulated to the electrical requirements of IEC 60900
- Compact and lightweight
- Open cutting head rotates infinitely
- Automatic retraction when the operation is complete
- Manual retraction where required

CAT NO (TOOL ONLY)	ES32SISML-WSH
CUTTING FORCE	20kN
STROKE/OPENING WIDTH	32mm dia
CUTTING RANGE	Up to 400mm ² Cu, Al cores
WEIGHT INC. BATTERY	2.1kg

- Environmentally-friendly hydraulic oil, biodegradable
- Quick motor stop
- Ergonomic 2-component housing with soft grips for comfortable and safe, one hand operation
- Faster cutting time than ratchet type cutters
- Optimal centre of gravity
- More cost effective model due to slightly reduced functionality
- Takes standard 10.8V DeWalt Li-Ion Batteries
- Length with battery is 15" (38cm)



Klauke Remote Bluetooth Cutting Tool

This unique tool allows the user to operate and control the cutting function remotely via Bluetooth technology. Ideal for cutting applications at height where there are potential benefits from carrying out this work from ground level.

**NETWORK RAIL
APPROVED**

When used in conjunction with telescopic or sectional operating rods the user is easily able to manoeuvre the cutter into a convenient position to enable cutting of jumpers, conductor tail ends, vegetation and debris on or in the vicinity of power lines. Available in 3 versions for cutting ACSR conductor (20mm dia max), copper and aluminium conductor (32mm dia.) or vegetation such as small tree branches up to 50mm diameter. The tool is operated via the BTC2 remote fob which has a simple 2-function button. Available on Makita or Bosch battery platforms. All tools can be operated as hand tools by removing the yellow attachment collar and switching from remote to manual operation via the LED display.

Please call us for a demonstration.

Features & Benefits:

- Operation can be switched between manual / remote operation using LED Display
- One-button operating concept for controlling all functions
- Balanced centre of gravity for easy handling and effortless operations, especially when used with hotsticks, telescopic or sectional operating rods
- Quick motor stop for added user safety
- Automatic retraction when cutting operation is complete. Manual retraction when required
- Operated remotely using Bluetooth fob
- LED for workplace illumination
- Open head rotates through 300°
- LED display for tool data
- Yellow collar fitted with universal rose to allow all angle attachment of operating rod ensuring perfect positioning for cut

Klauke®

BLUETOOTH CONNECTIVITY



Remote fob

CAT NO	CUTTING RANGE	BATTERY	WEIGHT
ES20RMCFB	Max 20mm dia ACSR/Cu/Al	Bosch	2.0kg
ES20RMCFM	Max 20mm dia ACSR/Cu/Al	Makita	2.0kg
ES32RMCFB	Max 32mm dia Cu/Al	Bosch	2.0kg
ES32RMCFM	Max 32mm dia Cu/Al	Makita	2.0kg
ES50RMCFB	Max 50mm dia vegetation	Bosch	2.0kg
ES50RMCFM	Max 50mm dia vegetation	Makita	2.0kg



The first remote-controlled cable cutter with blade position sensor ensures cable is completely cut through. ESG105RMCCFM and ESG65RMCCFM were developed in collaboration with experts from the utilities sector to find a method to cut electrical cables safely.


In contrast to overground power distribution systems, it is not always possible to trace underground systems, making it difficult to guarantee a voltage-free condition. The two battery-operated hydraulic cutters for cables up to 105 mm Ø and 65 mm Ø can be operated by REMOTE CONTROL and thus protect the user in the event of a cable still under power. This is the first cutting tool with REAL ENDLAP CONTROL, i.e. the position of the blades is constantly checked and an acoustic signal is emitted as soon as they overlap completely.

ESG105RMCCFM (105mm) & ESG65RMCCFM (85mm)

- Manual or remote Bluetooth operation
- Extremely wide cutting range
- Convenient and easy to use thanks to the ultra light design
- Visual and acoustic cutting confirmation from the remote control when the cutting operation is complete
- Remote controlled forward-stop-reverse
- Long range - under optimal conditions up to 70 meters



CAT NO	ESG105RMCCFM	ESG65RMCCFM
HEAD TYPE	Guillotine Closed	Guillotine Closed
CUTTING FORCE	120kN	60kN
CUTTING RANGE	max. 105 mm Ø, e.g. NYCWY 4 x 240 SM/120	max. 65 mm Ø, e.g. NYCWY 4 x 240 SM/120
CABLE TYPES	Copper and aluminium cables	Copper and aluminium cables
WEIGHT INC BATTERY	10.5kg	6.0kg

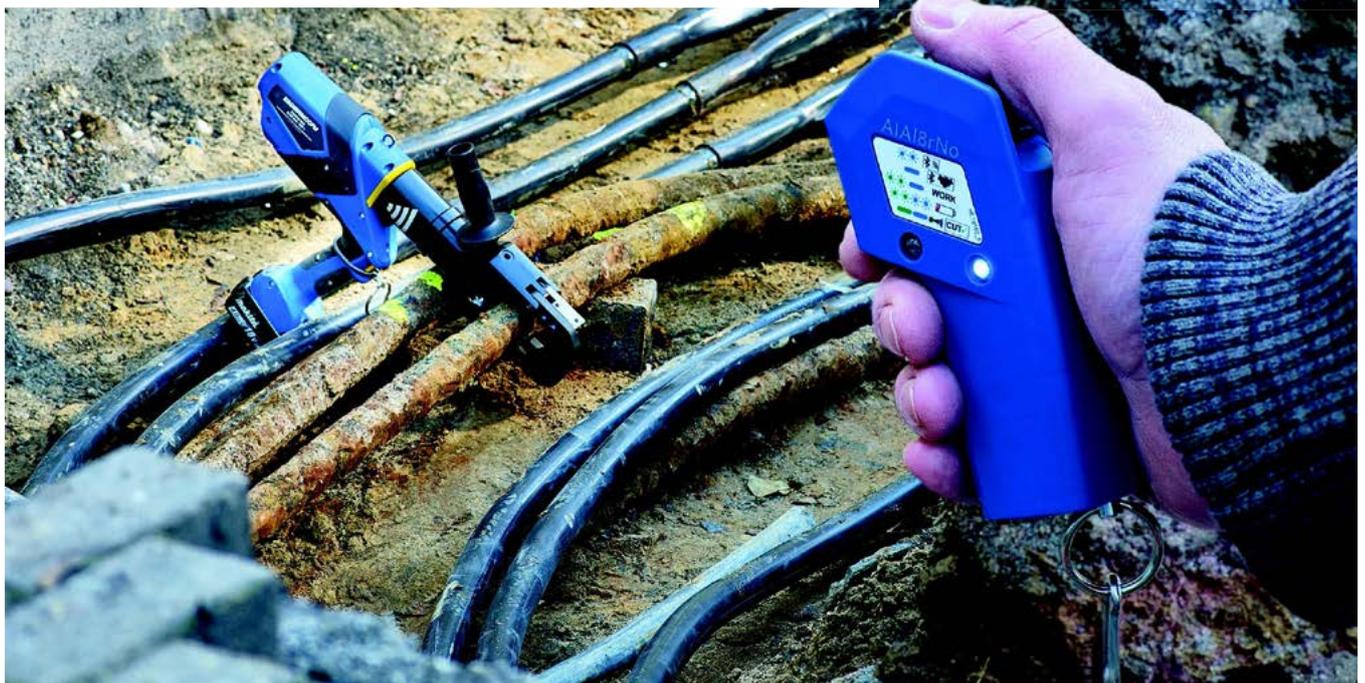

Klauke Large Cable Cutters

ESG105CFB (105mm) & ESG85CFB (85mm)

- Large battery hydraulic cable cutter up to 105mm/ 85mm diameter
- Suitable for Cu, Al and armoured cables
- Up to 120kN cutting force
- Remarkably lightweight for tools of this performance class
- One button operation with automatic blade retract
- Bosch or Makita 18V Li-Ion battery

CAT NO	ESG105CFB	ESG85CFB
HEAD TYPE	Guillotine Closed	Guillotine Closed
CUTTING FORCE	120kN	60kN
CUTTING RANGE	105mm dia	85mm dia
CABLE TYPES	Armoured Cu & Al	Armoured Cu & Al
WEIGHT INC BATTERY	10.7kg	6.8kg



Medium Cable Cutter

Klauke ESM50CFB

- In-line compact hydraulic cable cutter up to 50mm diameter
- 2 stage hydraulic system for rapid blade advance
- LED work light
- Open rotatable head
- Bosch or Makita 18V Li-Ion battery

CAT NO	ESM50CFB
HEAD TYPE	Cutter Open
CUTTING FORCE	38kN
CUTTING RANGE	50mm dia
WEIGHT INC BATTERY	3.0kg



Small Bolt Cutter

Klauke EBS12CFB

- Battery powered 'bolt-cutter'
- Use anywhere manual bolt cutters are used today
- One button operation, helps eliminate manual handling injuries
- Suitable up to 12mm stainless rod (med/hard material ST.37)
- Bosch or Makita 18V Li-Ion battery

CAT NO	EBS12CFB
CUTTING FORCE	45kN
CUTTING RANGE	12mm dia
WEIGHT INC BATTERY	2.0kg

RIDGID STRUTSLAYR

The RIDGID® STRUTSLAYR™ delivers shop quality, burr-free strut channel cuts on the jobsite in 5 seconds or less. Compatible with RIDGID 32kN press tools, the STRUTSLAYR strut cutter offers a clean, consistent cut with a simple pull of a trigger: no grinding or sawing sparks!



- **Shop Quality:** Burr-free cuts eliminate the need for extra filing
- **Increased Efficiency:** Clean, consistent cuts in 5 seconds or less
- **Shear Cut:** no grinding or sawing sparks
- **Portable:** Easy to move around the job site and mounts to RIDGID TRISTANDS
- **Built-in Measuring Guide:** allows accuracy of cut on job site



CAT NO (HEAD ONLY)

64118

CUTTING CAPABILITY

Up to 12ga 1-5/8" x 1-5/8" (41mm x 41mm) or 1-5/8" x 13/16" (41mm x 21mm) (max. 2.5 mm wall-thickness)

PRESS TOOL COMPATIBILITY

RIDGID® Standard Series 32kN Press Tools (such as the RIDGID RP350, RP340, RP330)

CUT SQUARENESS

+/- 2° (strut must extend past strut support)

SHEARING DIES

1-5/8" x 13/16" (41mm x 21mm) Dedicated Die
1-5/8" x 1-5/8" (41mm x 41mm) Dedicated Die

WEIGHT OF HEAD

5.4kg

LOOKOUT Voltage Detection Network

The LOOKOUT Voltage Detection Network detects electric field in ranges between 4kVAC and 500kVAC

- The LOOKOUT Voltage Identification Mesh Network is a network of up to six voltage detectors that work together to provide directional identification of where an energised field is located
- Visual and audible alerts to warn of an energised field
- Colour coded lights indicate which devices are closest to the voltage source and which are further away - using a red-amber-green sequence
- Communication distance between devices up to 30 metres

The LOOKOUT Detectors can provide an additional warning to users exposed or working around energised, high voltage electricity and equipment. Awareness of the presence of a high voltage electric field allows the user to take additional precautions against accidental contact with energised equipment. The LOOKOUT Voltage Detection Network provides an early warning of the proximity of potentially hazardous high voltage electricity and equipment. The detector lights will change colour from green, amber and red, will spin and a buzzer will sound when an electric field is detected and will continue to spin for as long as the electric field is present.



Features:

- Adjustable sensitivity based on system voltage from 4kV up to 500kV via the LOOKOUT App
- Accessory brackets available to mount on cones, hang on fences or poles to surround a work area
- Magnetized to mount directly on equipment
- Waterproof housing for use in any weather condition
- Powered by rechargeable Li-ion battery
- Battery life is up to 2 weeks in Monitor mode and up to 8 hours in Alert mode





V-WATCH Personal Voltage Detector

- A loud alarm and bright flashing lights that are both directed upwards toward the user for high awareness and visibility
- A slim housing with built in lanyard, offering a compact and lightweight solution
- Automatic self-test when the unit is activated for detection of voltage
- Rugged design protects against environmental extremes such as water, dust and temperature
- Voltage range 2.4kVAC and above

WATCHMAN Work Area Voltage Detector

- Detects electric fields surrounding high voltage conductors and power distribution equipment
- Provides an extra level of safety
- Visually alert to the presence of an electrical field by spinning red LED indication
- Provides a "heartbeat" pattern to indicate it is actively checking for the presence of high voltage electric fields
- Powerful neodymium magnetic base for easy mounting
- Voltage range 4kVAC - 765kVAC



DVM-80-UVM Universal Digital Voltmeter

- High accuracy dual stick voltmeter and phasing set with capacitive test point mode and peak hold
- 5V - 80kVAC range
- Digital display
- Accurate and repeatable to within 1%
- Verify a conductor is de-energised prior to earthing
- Comes with proving unit

Euro PowerMaster Extension

The Euro PowerMaster Extension ladders are stronger than any other fibreglass ladders in the market, featuring a unique Strongbox construction.

The TerrainMaster provides outstanding stability, eliminates lateral twist and sideways movement. Levels, stabilisers and provides unprecedented safety when working on uneven ground.

The Branach D Rung provides stability and comfort when working at height, and its non-slip surface ensures safety in all weather. A proven product you can trust.

- Fibreglass stiles
- Electrically safe
- Lightweight and easy to position
- Outstanding durability
- Dramatic reduction in sway and twist
- All-weather resistant
- TerrainMaster maximises grip and stability on uneven ground



Fibreglass Extension Ladder

Extension Ladder with Fall Control

The non-conductive Branach FEU ladder series exceed the requirements of the latest EN131 standard due to the introduction of the Terrain Master Stabilising and Levelling system.

This standard was updated to implement higher degree of stability in ladders, particularly with regard to sideway movement at the top of the ladder and slippage at the base of the ladder where accident statistics reveal these to be common contributory factors. Increasing the width of the ladder base makes climbing them more stable and safer for the user.

Under the latest standards there is a specific engineering formula which calculates the minimum base width relevant to the height of the ladder. The Branach FEU ladder series not only complies but exceed this standard due to the introduction of the Terrain Master Stabilising and Levelling system. The Branach FEU ladder series has been rigorously tested as per BS EN 131-1:2015 & BS EN 131-2:2010+A2 2017 and independently certified by an accredited third party.


Terrain Master

Developed to meet the new demanding environment at the workplace and latest standards requiring higher levels of ladder stability. Terrain Master stores in a compact format to suit existing vehicle roof racking systems and quickly deploys ready for use.

With the ability to cater for uneven terrain there are no requirements to dig out or chock the ladder footing, saving time and enhancing safety. Terrain Master greatly increases the base width of the ladder and exceeds the requirements for EN 131-1: 2015. Importantly the extra spread provides sideways stability for the ladder system. Large feet prevent sinking into soft ground, articulating to accommodate various ground conditions.

Tether System

A simple, easy to deploy tether system exclusively from Branach gives unprecedented stability and tie off. Pulling inwards and downwards it prevents slip back and fall back, providing a secure connection to the structure. The tether system stores within ladder and is always available when required during set up. Deploys quickly and easily around any structure and, with the correct attachment anchors, any situation can be accommodated from soft ground, timber, concrete, brick work etc.

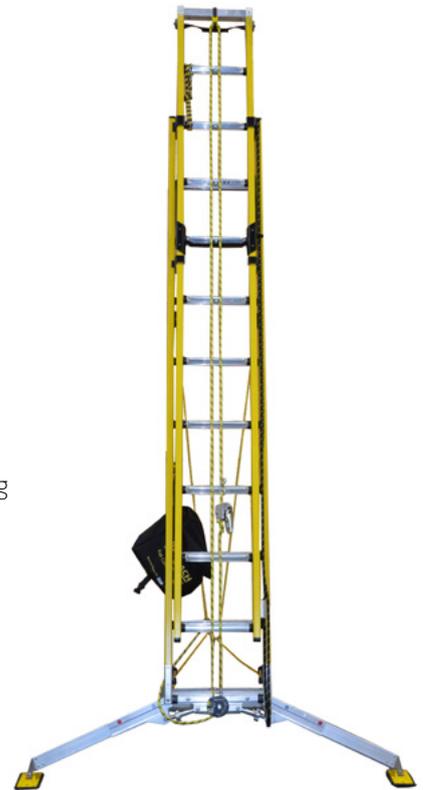

Fall Control System

Extension Ladder with Fall Control

Provides the highest level of protection for the worker ensuring they are safe from the moment they leave the ground, throughout access and egress to and from the work area. In the event that the user separates from the ladder, due to a fall or other emergency, the innovative life line and fall arrest system will activate preventing further injury. An integrated rescue system allows operation from the ground by a second person eliminating the need for further rescue equipment or for the rescuer to climb the ladder.

- The worker is safe from the moment they leave the ground
- The stability system works from the ground up
- Fall control system stems from the increased base of support
- The ladder is secured with an integrated tether system
- Integrated rescue by second user from the ground
- Allows workers to work from the ladder with both hands comfortably and safely
- To meet and exceed compliance and international standards
- Design fit for purpose, critical piece of climbing equipment
- Periodic inspection schedule recommended
- Available in extended lengths 3.9m, 5.1m, 6.3m, 7.5m and 8.7m
- Load rating 150kg

Features

- | | |
|--------------------------------|---|
| 1 Cross Bar and Upper Pulley | 7 Rope Bag |
| 2 Rung Work Position Hook | 8 Vertical Lifeline (configured for rescue) |
| 3 Non-slip Rungs | 9 Lower Tether Hooks |
| 4 Tether Tensioner | 10 Level Bubble |
| 5 Box Rail Rung Joining System | 11 Descender |
| 6 Tether Rope | 12 Extra Wide TerrainMaster |



EuroMaster All Terrain Step Platform

Individual adjustable legs offer the convenience and stability that users and safety experts have been asking for and it meets the EN 131-7 standard.

- Complies to EN 131-7
- Both legs deploy and extend independently to 1.3 metres allowing safe work on uneven ground or rough terrain
- Lightweight and durable yet load rated to 150kgs
- Integrated front and rear safety rail situated at 0.96m above the deck
- Step covers and equal step distance ensure safe access and egress
- Legs fold within profile making transport an manual handling stress free
- Fibreglass construction so workers are isolated from the ground making the product suitable for electrical work
- Unique construction allows for quick action set up, portability, and easy store



Never Let Go

NLG (Never Let Go), A robust range of drop prevention equipment, designed to perform in the harshest environments. All items are serial numbered, third-party tested and CE marked.



Tether Tape (5kg)
CAT NO: 101355

Small D Ring **Large D Ring**
CAT NO: 101361 CAT NO: 101362



Tether Loop (3kg) 150mm
CAT NO: 101381



Tether Ring (1kg) 38mm
CAT NO: 101275



Mini Retractable Tool Lanyard
CAT NO: 101480



Coil Tool Lanyard
CAT NO: 101370



Bungee Lanyard
CAT NO: 101372



Wristband
CAT NO: 101365



Belt Loop
CAT NO: 101366



BiLock Anchor
CAT NO: 101362



Ascent Bucket
CAT NO: 101360



Tall Tool Bag
CAT NO: 101492



Tool Holster
CAT NO: 101470



Aero Pouch
CAT NO: 101400



Linesman Bag
CAT NO: 101421



MEWP Bag
CAT NO: 101423

PowerLine Sentry

Power protection products have to physically stop animals, trees, and other environmental factors from interfering with the grid. For this to work, an effective design must take the environment into consideration. Accordingly, effective power protection is effective wildlife protection.



Bird Flight Diverter

Our patented bird flight diverters provide maximum visibility in low light conditions and from all angles – supporting research proving that visibility in low light is the most important aspect in preventing collisions.

CAT NO: BFD



Cut Out Cover

Adjustable snap-fit clip provides tight universal fit without any pins or clamps. Design fully covers arcing horns to prevent electrocution as well as top portion of the cutout, allowing insulator skirts to naturally clean. UV resistant. Hotstickable. Load Buster Compatible. Secure in high winds (>85 mph) for sustained periods.

CAT NO: CT-D02



Bushing Cover

Hotstick compatible eye-screw adjusts to the size of the bushing for a tight and secure fit. Design covers energized portion of the insulator, allowing insulator skirts to naturally clean. Mechanical hinges provide enhanced durability. Dimpling is removable for infrared inspection. Compatible with distribution transformers, capacitors, potheads and primary metering.

CAT NO: BC-D01



RipStop Line Hose

Our complete line of Rip-Stop™ tear-resistant insulating silicone line hose is vulcanized for a long service life. The slit has a 50% overlap for better retention and increased insulating value. It is pliable and both high and low temperatures, is hotstick compatible, and is easy to install.

CAT NO: LH



Raptor Guard

"X" shape isolates energized danger zones and deter perching, as proven by live flight cage raptor tests conducted in collaboration with the Rocky Mountain Raptor Program. Multiple attachment methods available.

CAT NO: RG

Orange canvas tool bags designed with highest quality British Standard materials used by the military and emergency services, providing a durable bag that is designed to last. Developed with Western Power Distribution, the tool bags offer a variety of different attachment options, all conveniently placed for the linesman to access their tools. The bright orange colour allows the buckets to be easily identifiable and are used to help identify tools that are being utilised for working on live low voltage systems.

Features

- Loops for tool tethering and pockets for secure tool storage
- Removable internal divider
- Multiple options for bucket attachment - eyelets, loops and external belt loop
- Tool buckets can be secured to wood poles using the velcro adjustable pole belt - Range 200mm-450mm diameter
- Plastic Hooks provided for attachment to MEWP buckets



CAT NO	DESCRIPTION	DIMENSIONS
ROTB	Round Orange Tool Bag with Dividers / Internal Loops	28cm (H) x 26cm (Dia)
OVOTB	Oval Orange Tool Bag with Internal Loops and Plastic Rigidity Plates	22cm (H) x 21cm (D) x 34cm (W)
ROSB	Round Orange Shrouding Bag	30cm (H) x 23cm (Dia)
V130	Orange Webbing Pole Belt for Pole Attachment - 200mm-450mm dia	129cm (L) x 5cm (W)
LVM-BH	PVC MEWP Bucket Hooks (Supplied as a Pair)	15mm Dia

Telescopic Rods

The "No-Twist" Telescopic Rod is designed and manufactured by Hastings Fibreglass, the originators of Telescoping Hot Sticks.



NETWORK RAIL
APPROVED



The unique triangular design ensures the rods can be erected speedily whether being used for fusing, switching and tree cutting operations or to apply ropes to pole tops for use with "First Man Up" equipment. As standard the rods are supplied with the universal fitting and hook.

HV Range

TEL-O-POLE II, The No-Twist Stick

- Triangular shape - enables each section to lock in automatically. No twisting required to lock sections together
- High visibility - fluorescent top section is highly visible and has a foam core
- Extra reach - standard models reach to 30ft, 35ft or 40ft
- Shorter rods - designed for engineers to fit in smaller vehicles
- More versatile - use only the number of sections required to perform each job
- For reduced height simply depress the lock button and slide the bottom section off - this allows for a lightweight tool to perform the work task more easily
- Easy disassembly for cleaning and maintenance - no tools are required for disassembly
- Ergonomic design - allows the operator a more positive grip for greater control
- Easy maintenance - all sections have a smooth glossy surface for routine cleaning and waxing
- Dielectrically tested - each section is tested to 100kV per foot
- HV-208 only 27 inches long when retracted - excellent for use from bucket truck



Universal fitting head supplied as standard

Nylon head available upon request



Intermediate sections with large buttons for ease of use with or without gloves



Bottom section has rubber base cap which cushions and protects the fibreglass

CAT NO	EXTENDED LENGTH	RETRACTED LENGTH	WEIGHT	NO. OF SECTIONS
HV-208	8' (2.43m)	27" (0.69m)	1.4kg	5
HV-220	21' (6.43m)	62" (1.58m)	2.92kg	5
HV-225	25' 6" (7.8m)	64" (1.63m)	3.68kg	6
HV-230	30' (9.14m)	66" (1.67m)	4.55kg	7
HV-230S	21' (6.4m)	52" (1.32m)	3.8kg	7
HV-235	35' (10.67m)	68" (1.72m)	5.5kg	8
HV-235S	25' (7.62m)	53" (1.34m)	4.85kg	8
HV-240	39' 6" (12m)	69" (1.75m)	6.5kg	9
HV-240S	29' (8.84m)	54" (1.37m)	5.78kg	9

For nylon head in place of universal head add 'SP' to catalogue number. eg HV-230-SP.



HV-208

Accessories

CAT NO	DESCRIPTION
TEL-AD	Adapter to convert universal fitting to accept standard pole heads
B70X4RW2P	Storage bag with 2 pockets for HV-230, HV-235, HV-240 & MV Range
B56X4RW2P	Storage bag with 2 pockets for HV-230S, HV-235S & HV-240S



TEL-AD


T-RAPTOR - Telescopic Rod Adaptor

The T-RAPTOR has been specifically designed and developed to allow the use of pole heads with both a "universal fitting" and a traditional "two pin sectional rod fitting" to be used with Hastings Telescopic Poles.

The universal fitting is the type used originally in North America, but is now common around the world and there are many tools and instruments that are manufactured with this fitting.

In the UK Rail and Electrical Utility industries historically the two pin fitting has been used on the top of the sectional rods with earthing applicators, fuse pullers, instruments and other tools having the corresponding two holes that fit over the pins.

Until now the Hastings rods have generally been supplied with a metal adaptor with a split pin and chain to allow two pin fittings to be used on the Hastings Telescopic pole. The T-RAPTOR will provide a better fit for UK type pole heads whilst reducing the amount of exposed metal work at the top of the pole.

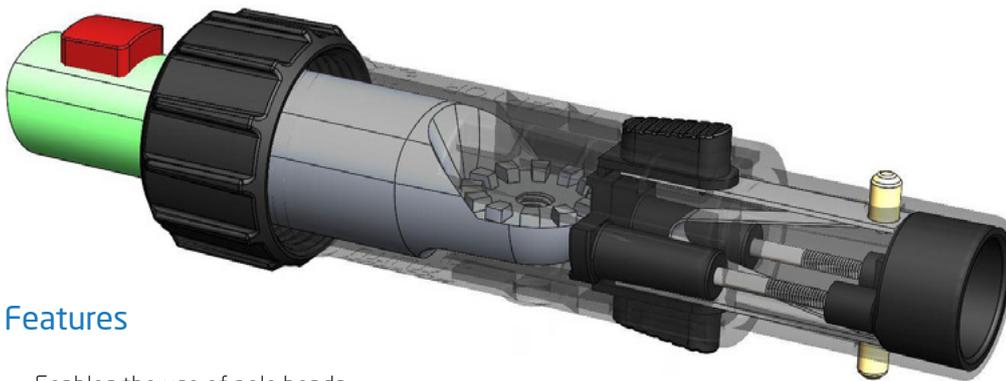

Features

- Enables the use of pole heads with "universal" or "two pin" design to be fitted easily to Hastings Triangular Telescopic Rods
- Strong moulded plastic construction
- Non-conductive - reduces exposed metal work at the top of the pole. Negates risk of flashover
- Angled and tapered buttons have been designed to enable operation using minimum effort



Telescopic Measuring Rods



MV Range

Triangular Operating Rod with Measurements



This heavy-duty operating rod features metric scale measurement graduations for eye-level reading. Graduations are silk-screen printed directly on the fibreglass sections and will not chip or peel. The surface is then re-coated with a hard, high-gloss epoxy finish. Measurements are printed in large, easy to read numerals.

The MV range enables users to operate switches and fuses, perform tree-cutting operations and measure heights and clearances.

Note: The MV range is a triangular "No-Twist" stick.

CAT NO	EXTENDED LENGTH	RETRACTED LENGTH	BASE DIAMETER	WEIGHT	NO. OF SECTIONS
MV-25	25' 7" (7.8m)	5' 4" (1.63m)	48.5mm	3.7kg	6
MV-30	30' 2" (9.2m)	5' 6" (1.68m)	52.5mm	4.5kg	7
MV-35	34' 9" (10.6m)	5' 7" (1.72m)	56mm	5.5kg	8
MV-40	39' 4" (12m)	5' 9" (1.75m)	60.4mm	6.5kg	9



Accessories



CAT NO	DESCRIPTION
B70X4RW2P	Storage bag, 70" long, with 2 pockets for HV230, HV235, HV240, MV30, MV35, MV40, M35, M40, M50.
B56X4RW2P	Storage bag, 56" long, with 2 pockets for HV230S, HV235S, HV240S.



M Range

Round Measuring Stick

The 'M' range of measuring sticks is ideal for fast and accurate measurements of overhead lines, structures, bridges and transport carriers.

- Lightweight construction and easy to use
- Measure heights up to 15m
- Eye level reading - no calculations required
- Positive locking buttons, spring-loaded, fast, accurate and easy to extend
- Plastic hook on tip section
- Large red printed graduations
- Storage bag available for all models

CAT NO	EXTENDED LENGTH	RETRACTED LENGTH	WEIGHT
M-25	24' 7" (7.5m)	5' 5" (1.67m)	1.45kg
M-35	34' 5" (10.5m)	5' 5" (1.67m)	2.66kg
M-40	39' 4" (12m)	5' 5" (1.67m)	3.4kg
M-50	49' 2" (15m)	5' 9" (1.76m)	6kg

Wireless Inspection HD Camera Kit

Our lightweight Wireless Inspection HD Camera Kit is completely weatherproof and is supplied with adaptors to fit either sectional operating rods or telescopic rods allowing remote inspection up to 12 metres.

Fully trialled and approved for use within Network Rail. The camera can be operated via a smart phone or tablet which then displays the images on screen and allows the operator to switch between video or still shots. This offers greater functionality and control ensuring that the highest quality imagery is obtained. The kit also includes a multi-function POV LED light for use at night or in poor visibility.

**NETWORK RAIL
APPROVED**

Possible Applications Include:

- Inspection of OLE Network
- Pantograph inspection
- Transformer identification
- Switch inspection
- Vegetation management
- Inspection of structures such as bridges, gantries, building roofs and gutters

Overview of Specifications:

- 12 megapixel HD camera
- Wi-Fi connectivity for use with compatible smart phone or tablet
- Up to 4k video, wide angle. Settings can be changed to suit conditions
- Wireless viewing up to 100 metres (line of sight)
- Storage media is Micro SD card, 64GB. Allows 4 hours video recording or 9500 photos at 12 megapixel
- Imagery can be viewed and transferred wirelessly

The Inspection Camera Kit Consists of the Following:

- 1 x GoPro Hero HD camera unit
- 1 x Adaptor to fit universal rod
- 1 x Nylon adaptor to fit top section rod
- 2 x USB data & charge cable
- 1 x Genuine GoPro 240V charger with twin outlet
- 1 x POV LED light
- 1 x User manual
- 1 x Camera and accessory storage bag
- 2 x Genuine GoPro Li-Ion batteries
- 1 x 64 GB Micro SD memory card



CAT NO

DESCRIPTION

PADS NO

GP-WICK

Wireless Inspection HD Camera Kit

0111-110836

Dial Type Dynamometers



Compact, lightweight, rugged construction - designed for line work. Graduated in kN. Accuracy $\pm 3\%$ full scales. Both pulling eyes rotate 360°. Optional maximum reading indicator pointer kit available. Optional, easily installed screw-on face with twin steel protective bars also available. Each tool is serial numbered and supplied in a heavy duty fabric case with calibration certificate. Available from 5-100kN capacity.

CAT NO	TM-5	TM-10	TM-20	TM-30	TM-50	TM-100
CAPACITY	5kN	10kN	20kN	30kN	50kN	100kN
WEIGHT	0.9kg	1.0kg	1.1kg	1.9kg	2.6kg	6.0kg

Conductor Grips (Come-Alongs)


Bare Al, Cu & ACSR Grip

A versatile, lightweight grip for bare Cu, Al & ACSR.

HT-1 - this one grip can replace three grips from other manufacturers.

HT-3 - for larger conductors, this grip covers a wide conductor range whilst being significantly lighter than the competition.

CAT NO	CONDUCTORS	WLL	WEIGHT
HT-1	25mm ² to 100mm ² AAAC & ACSR 16mm ² to 125mm ² HD Copper	1600kg	1.5kg
HT-3	175mm ² to 300mm ² AAAC 150mm ² to 200mm ² ACSR	4120kg	4.7kg

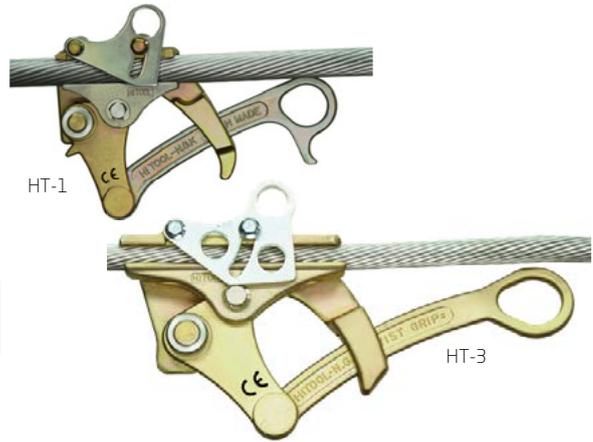

Premium Grip

Combining the extensive range taking capacities of the HT-1 and HT-3 this grip offers an alternative for medium sizes of conductor. Offering a longer jaw length than the HT-1 with a greater working load limit.

CAT NO	CONDUCTORS	WLL	WEIGHT
HT-1M	50mm ² to 175mm ² AAAC 50mm ² to 175mm ² ACSR 32mm ² to 150mm ² HD Copper	2000kg	1.9kg

Staywire Grip

Easy to apply, lightweight grip for standard staywire range.

CAT NO	STAYWIRE	WLL	WEIGHT
HT - STAY	7/3.25mm & 7/4mm	2245kg	1.7kg



In addition to grips for bare conductors, covered conductors and stay wire we are able to offer grips for ABC and other specialised conductors that have all the common features of Hi Tool Grips - lightweight, range taking and easy to apply.



ABC Grips

Versatile, lightweight grips for ABC. Featuring trigger grip as standard.

CAT NO	ABC CONDUCTORS	WLL	WEIGHT
HT-ABC-S	2 x 35mm ² to 2 x 50mm ²	500kg	0.6kg
HT-ABC-M	4 x 35mm ² to 4 x 95mm ²	850kg	2.4kg
HT-ABC-L	4 x 95mm ² to 4 x 120mm ²	850kg	2.6kg

Covered Conductor Grips

Lightweight grips for common sizes of BLL and PVC covered conductors.

CAT NO	CONDUCTORS	WLL	WEIGHT
HT-2	50mm ² , 120mm ² & 185mm ² BLL	2245kg	2.4kg
HT-1M	25mm ² to 160mm ² PVC Covered Conductor 50mm ² to 120mm ² BLL Conductor	2000kg	1.9kg



Special Features



Grip for use with Hot Sticks

Selected grips available for hot stick working, includes spring-loaded latch, hot stick ring and notched handle.



Twist Grip

Patented twist grip handle available on selected models. Offsets the pulling eye which enables better alignment of the ratchet puller and grip reducing the possibility of distortion and damage to the conductor.



Trigger Grip

Patented one handed "Trigger Grip" operation available on selected models. Allows the tool to be easily placed on to, and removed from, the conductor.

Please contact us for further information on grips for specific conductors

Wedge Type Tap Connectors

CPI wedge connectors consist of a spring 'C' body and wedge combined with a 'shear head' bolt and offer a high performance connection that has low resistance, is durable and easy to install. The spring body of the connector will flex and maintain a constant force as thermal cycling causes conductors to expand and contract.



During installation, when the correct spring tension is achieved, the shear head bolt will break off giving the installer a positive indication of a correctly completed connection. If necessary the connector can be removed by unscrewing the bolt.



Fig 1



Fig 2

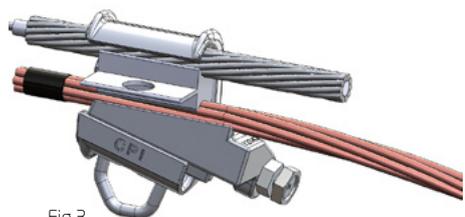


Fig 3



Fig 4

Features

- Utilises the industry proven wedge connecting principle and is quick and easy to apply using only a spanner, ratchet wrench or impact wrench.
- The spring like qualities of the 'C' body ensure permanent connection and maintains consistent pressure on the conductor.
- Can be used easily for live line connections using hot sticks.
- High conductivity grit type corrosion inhibitor is factory applied for ease of installation and longevity while the connector is in service.
- Meets or exceeds the current carrying capacity of the conductors being connected.
- Easy to remove and reuse without damage to the conductor.
- Full range of sizes available to accommodate all combinations of conductor and tap.
- Available in aluminium body (fig 1) with high conductivity aluminium alloy interface or copper and bronze alloys (fig 2) with pure copper interface and can be tin plated for bi-metal connections (fig 3).
- Bail type wedge connectors (fig 4) are used to protect the main line conductor from damage and arcing when hot line clamps are used in live working applications. Bail type wedge connectors are extremely beneficial where quick and easy disconnections and reconnections are required.
- Copper bail or whole connector can be tin plated for bi-metal applications.
- Available as a pad tap connector (fig 5) for fixing NEMA standard fittings such as paddle stirrups, for ease of making live line connection using hot line clamps.
- Paddle stirrups (fig 6) are of bi-metallic construction allowing connection between aluminium components and bronze hot line clamps or other copper/bronze connectors.

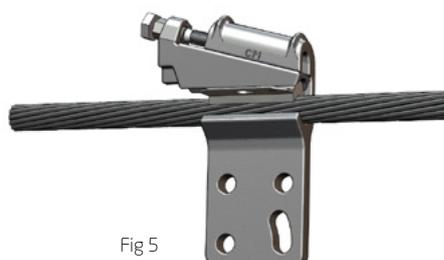


Fig 5



Fig 6

A range of portable Area/Scene Lighting that can be used in a variety of situations and circumstances. We can offer waterproof, fire, ATEX and impact-resistant lights for the toughest of environments. The lights available have a wide range of attachment methods, tripod mountable, magnetic, hooked and more. The lighting available can offer up to 20,000 lumens output and can cover up to 360 degrees.



Scangrip SPS Work Light

Up to 10,000 lumens output with a run time of up to 10 hours. Weight 3.6kg.



LedLenser IF4R & IF8R Area Lights

Rated IPX4 & IP5X, these rechargeable area lights offer up to 2,500 lumens (IF4R) and 4,500 lumens (IF8R) output.



Scangrip Tripod



TradeTuff TUFF T-4000

Up to 4,000 lumens output with a run time of up to 16 hours. Weight 3.1kg.

Additional lighting products available on request.



Horizon Utility Supplies Ltd
Unit 1, Windmill Business Park
Windmill Road
Clevedon
Somerset
BS21 6SR
United Kingdom

Tel: +44 (0)1275 342700
Email: contactus@hor-i-zon.com

www.HorizonUtilitySupplies.com